


HIGH PRESSURE NYLON REINFORCED FLEXIBLE HOSE

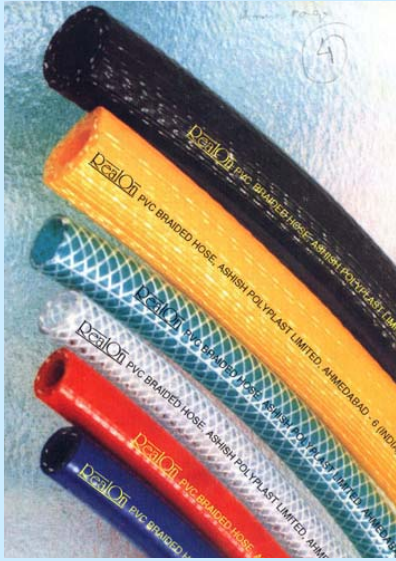

REALON is the industrial high pressure Nylon Reinforced Flexible Hose designed for applications requiring a stronger, more resistant hosepipe, manufactured on fully automatic modern plant. As a result of many years of experience combined with advanced technology, perfect quality control throughout the production process gives the actual consumers maximum quality assurance.

REALON is made from high quality thermoplastic compound and reinforced with high tenacity special quality synthetic yarn crosswise and lengthwise between two layers of PVC and are bounded together to make the hose as homogenous entity for multipurpose industrial applications and for high pressure applications in Liquid and Air conveyance.

PROPERTIES:

- Light weight and flexible
- Strong enough to withstand high pressure
- Abrasion Resistant
- Rodent Proof
- Crush and Kink Resistant
- Resistant to Chemicals: Acids and Alkalies.

REALON AIR & PNEUMATIC HOSE (Transparent)

AIR & PNEUMATIC HOSE



REALON AIR & PNEUMATIC HOSE is reinforced with high tenacity yarn to meet the pressure requirements for General Construction Work, Road Building, Tunneling, Metallic and Non metallic Ore Mines, in Structural Shops with Chipping, Grinding and Revetting Appliances, Service Station for Tyre Inflation, for Pneumatic Tool use in industries and for connection to the Telephone, Shower, Hot Water Geyser, other Sanitary Fittings and D.C.P. Fire Extinguisher. Our transparent hose, particularly 20 mm ID can be successfully used for Rock Drilling Applications.

Specifications:

SIZE IN MM	WALL THICKNESS IN MM	WORKING PRESSURE AT 20°C KG/CM ²	STANDARD LENGTH IN METERS
5	2.5	15	50/100
6	3	5	50/100
8	3	25	50/100
10	3.5	25	50/100
12	3.5	20	50/100/200
15	3.5	20	50/100
20	4	20	50/100/200
25	4.8	15	50/100
31	4.8	15	50/100
38	5	15	30/50
50	6	10	30/50


REALON SUPER SPRAY HOSE (Yellow)

REALON SUPER SPRAY HOSE is suitable for high pressure spraying of Water based Chemicals, Insecticides, Fungicides, Weeding etc. in Plantations. Orchards, Forestry, Parks, Vineyard, Maintenance and similar Agricultural Applications involving Spraying by hand or power driven pumps.

Specifications:

SIZE IN MM	WALL THICKNESS IN MM	WORKING PRESSURE AT 20°C KG/CM ²	STANDARD LENGTH IN METERS
10	4	40	60/100/200
12	4.5	30	60/100/200

REAL WELDING HOSE (Red & Blue)

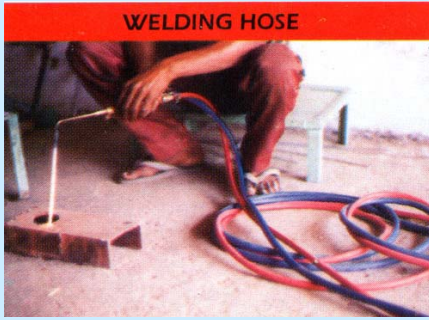


REALON WELDING HOSE meets all requirements for Welding, Brazing and Cutting operations including Oxygen and Acetylene Welding by hand and machine.

Realon Red Welding Hose is used for Acetylene while Blue for Oxygen and other Non-Combustible Gases.

Specifications:

SIZE IN MM	WALL THICKNESS IN MM	WORKING PRESSURE AT 20°C KG/CM ²	STANDARD LENGTH IN METERS
8	3	25	50/100
10	3.5	25	50/100

REALON WATER HOSE (Green)

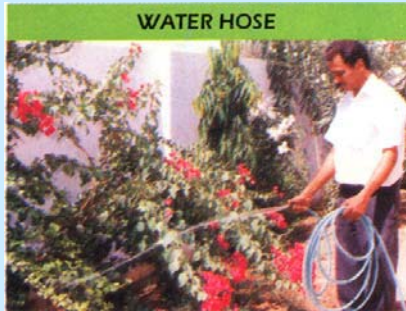


REALON WATER HOSE is recommended for general Water Supply in Gardening, Steel Mills and Engineering works, on Construction Sites, Irrigation Projects and wide range of allied applications.

Specifications:

SIZE IN MM	WALL THICKNESS IN MM	WORKING PRESSURE AT 20°C KG/CM ²	STANDARD LENGTH IN METERS
12	2	7	50/100
20	2.5	7	50/100
25	3	5	50/100

REALON CAR WASHING HOSE (Black)

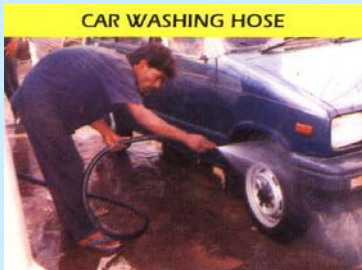

REALON CAR WASHING HOSE is made of 100% Oil resistant PVC compound and braided with extra strong synthetic yarn to withstand working pressure up to 30 / 40 Kg/cm². The outer surface is totally abrasion resistant.

Specifications:

SIZE IN MM	WALL THICKNESS IN MM	WORKING PRESSURE AT 20°C KG/CM ²	STANDARD LENGTH IN METERS
10	5.0	40	30/60
12	5.5	30	30/60

C. L. SHAH & CO.

137, Canning Street, Kolkata – 700 001

Phone: 2243 1198 / 3363, Fax: 2230 2678

Mobile: 98300 42037, Email: shiv_chopra@vsnl.net