


AGRICULTURE OR INDUSTRY ASHISH REALFLEX HOSE SPELLS EXCELLENCE ON BOTH THE FRONTS

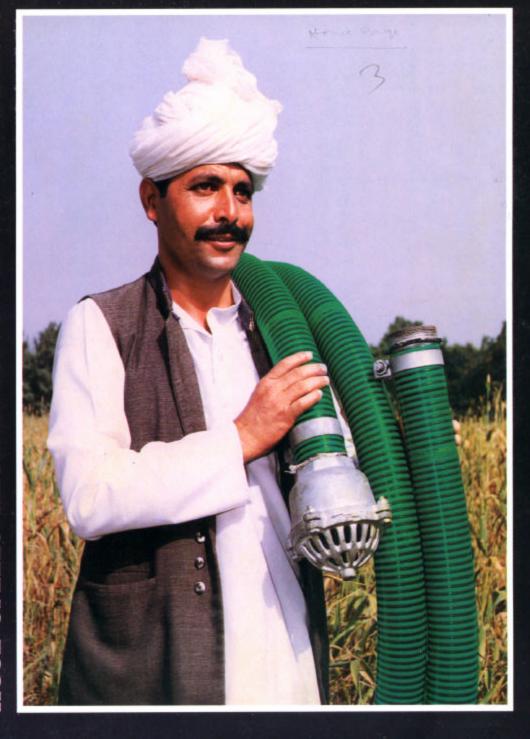


Ashish Realflex Medium Duty PVC Hose (Green) :

INTRODUCTION:

M/s. Ashish Agroplast Pvt. Ltd. Ahmedabad (India) are one of the leading manufacturer of "Ashish Realflex" brand Plastics reinforced hoses since many years.

Ashish Realflex is the real hose for suction and delivery application. It is strong, flexible, durable and easy to handle. It is a smooth bore reinforced PVC Hose which ensures optimum performance and minimum flow resistence to the product is conveys.

"Ashish Realflex" flexible PVC Hose with rigid reinforcement for suction and delivery is a result of many years of experience combined with advance technology, perfect quality control before and throughout the production gives the ultimate users maximum quality assurance.

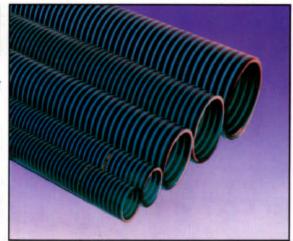

CONSTRUCTION AND APPLICATIONS:

"Ashish Realflex" flexible PVC Hose is produced under rigorously controlled conditions. A proper and adequate reinforcement is secured by proper placement of hard spirals of rigid PVC in the soft wall which gives strength to the wall as well as required flexibility to the entire hose length. This also provides outstanding crush resistance and working pressure ratings. Ashish Realflex Medium Duty flexible PVC Green Hose has countless applications in Agriculture and Industry. It is ideal for suction and delivery of water for Irrigation purpose in Agriculture with electric mono block and oil engines. Also suitable for suction and delivery of saline water, light acids, Alkalies and other chemicals and for conveying of granuals or fine particles of raw materials.

ADVANTAGES:

- 1. Light Weight:
 - Often only 1/4 that of rubber Hose has which makes it easy to carry and install
- 2. Flexible
 - The flexibility of hose is retained for many years. It can be bent as desired. No kinking bulging or bursting even in the mose severe working conditions.
- Resistance :
 - It shows strong resistance to high pressure and most of the chemicals, acids and alkalies. Ideal for high pressure suction & delivery of water.
- 4. Weather Proof:
 - Resistant to sun, ozone and weather.
- 5. Easy Fitting:
 - Easily installed, even to non-standard couplings.
- 6. Smooth Bore :
 - Allows fast flow.

PRODUCT SPECIFICATIONS:

SIZE		Diameter		Bending	Pressure	(at 30°C)	Standard
mm	Inches	Id mm	Od mm	Radius mm	Working Kg/Cm ²	Bursting Kg/Cm ²	Lengths meter
20	3/4	19. 0 <u>+</u> 0.5	23. 6 <u>±</u> 1.0	45	7	24	30
25	1	25. 4 <u>+</u> 0.5	30. 0±1.0	55	7	23	30
30	1x1/4	31. 8 <u>+</u> 0.5	36. 8 <u>+</u> 1.0	75	6.5	20	30
40	1x1/2	38. 0 <u>+</u> 0.5	43. 3 <u>+</u> 1.0	95	5	16	30
50	2	50, 8 <u>+</u> 0.5	57. 8 <u>+</u> 1.5	122	4	16	30/50
65	2x1/2	63.5 <u>+</u> 1.0	72. 0 <u>+</u> 1.5	160	. 4	16	30/45/50
75	3	76.2±1.0	85.0 <u>+</u> 1.5	272	3.5	15	30/36
100	4	101. 2 <u>+</u> 1.0	112.2 <u>+</u> 2.0	290	3.5	11	15/18/30

Recommended maximum working temperature: 60 / 70° C.

Ashish Realflex Heavy Duty Hose (Grey) :

This is a high performance hose of great resistance to pressure abrasion and rough handling. It is designed for heavy duty applications in construction and engineering, general industrial services, cement conveying, paper mills, chemical industry, coal mines, shipping, seeage disposal etc.

PRODUCT SPECIFICATIONS:

mm	SIZE Inches	Id Diam	Od mm	Bending Radius mm	Pressure Working Kg/Cm ²	(at30°C) Bursting Kg/Cm²	Standard Lengths meter
25	1	25.4±0.5	31.5±0.5	48	8	25	30
30	1x1/4	31.8±9.5	38.8±1.5	68	7	21	30
40	1x1/2	38.0±0.5	46.3±1.5	70	5.5	18	30
50	2	50.8±0.5	60.8±1.5	100	4.5	18	30
65	2x1/2	63.5±1.0	74.5±1.5	120	4.5	18	30
75	3	76.2±1.0	87.2±1.5	155	4.5	18	30
100	4	101.2±1.5	114.2±2.0	213	4.0	14	15/18/30
125	5	127.0±1.5	141.0±2.0	230	3.0	10	15/18
150	6	152.4±1.5	169.4±2.0	375	2.5	9	15/18
200	8	203.2	224.4	600	2.5	8.0	4.5/6

Recommended maximum working temperature: 60 / 70° C.

Ashish Realflex Oil Hose (Blue) :

Oil resistance casuish Realflex Oil Hoses are specially flexible. This hose is ideal for transportation of mineral oils, light oils, transformer oils, kerosence, liquid petrolieum products etc.



PRODUCT SPECIFICATIONS:

SIZE		Diameter		Bending	Pressure	(at 30°C)	Standard
mm	Inches	Id mm	Od mm	Radius mm	Working Kg/Cm ²	Bursting Kg/Cm ²	Lengths meter
25	1	25.4±0.5	31. 5 <u>+</u> 0.5	48	8	25	30
30	1x1/4	31.8 <u>+</u> 9.5	38. 8 <u>+</u> 1.5	68	7	21	30
40	1x1/2	38.0 <u>+</u> 0.5	46.3±1.5	70	5.5	18	30
50	2	50.8 <u>+</u> 0.5	60. 8 <u>+</u> 1.5	100	4.5	18	30
65	2x1/2	63. 5 <u>+</u> 1.0	74. 5 <u>+</u> 1.5	120	4.5	18	30
75	3	76. 2+1.0	87. 2+1.5	155	4.5	18	30

Recommended maximum working temperature: 60 / 70° C.

Ashish Realflex Duct Hoses (Grey):

Duct hoses are highly specialised in performance. They are widely used for pneumatic transportation; dust collecting equipments, washing machines and airconditioning equipments in buildings. Also suitable for carding machines and draw frames in Textile machinery.

This light weight, flexible, non-metallic hose has a specially compounded rigid PVC reinforcement which is helically wound and inseparably fused to the soft inner walls.

By its unique construction, our ducting results in a thin, very smooth wall, being almost completely protected from any possible crushing.



PRODUCT SPECIFICATIONS:

SIZE		Diameter		Bending	Standard	
mm	Inches	Id mm	Od mm	Radius mm	Lengths meter	
22	3/4	21	28.60	35	30	
25	1	25.4	31.10	45	30	
30	1x1/4	31.8	38.64	50	30	
40	1x1/2	38	45.00	55	30	
50	2	50.8	57.20	65	30	
60	2x1/2	60.5	68.50	75	30	
75	3	76.5	83.54	95	30	
100	4	101.2	108.94	125	30	
125	5	127	135.20	140	15	
140	5.1/2	140	148.5	150	15	
150	6	152.4	161.10	205	15	
160	6.1/4	160	170	210	15	
200	8	204	214.40	270	10/15	

Recommended maximum working temperature: 60 / 70° C.

Ashish Realflex Non-Toxic Hose (Transperant) :

Our Non-Toxic hose is made of special Non-Toxic PVC Compound which is safely recommended for conveying food product, beverages, arreated drinks, powdered cereals and their byproducts etc.

PRODUCT SPECIFICATIONS:

		Diameter		Bending	Pressure	(at 30°C)	Standard
mm SI	ZE Inches	Id mm	Od mm	Radius mm	Working Kg/Cm ²	Bursting Kg/Cm ²	Lengths meter
50	2	50. 8±1.5	57. 8 <u>+</u> 1.5	122	4	16	30
65	1x1/2	63. 5 <u>+</u> 1.5	72.0 <u>±</u> 1.5	160	4	16	30
75	3	76.2±1.5	85. 0 <u>+</u> 1.5	272	3.5	15	30

Recommended maximum working temperature: 60 / 70° C.

C. L. SHAH & CO.

137, Canning Street, Kolkata - 700 001

Phone: 2243 1198 / 3363, Fax: 2230 2678

Mobile: 98300 42037, Email: shiv_chopra@vsnl.net